



MAINTENANCE / CAUTION

Caution: Protect disk from freezing temperatures. If freezing temperatures exist, drain unit and set wet replacement disk aside to dry. Protect disk from direct sunlight. Not intended for outdoor use.

BACKFLUSHING

1. Unscrew the filter housing.
2. The replacement disk can be used inversely. Simply remove the replacement disk and reverse it by turning it around.
3. Reassemble the housing as per the instructions.
4. Use as normal.

"REMINDER" DECAL

The Reminder Decal is specially prepared as a reminder to change the replacement disk routinely.

1. Use a pen to fill out the installation and replacement dates.
2. Peel off sticker and affix to the corner of a dry mirror or any glass surface.

One-Year Limited Warranty

CRYSTAL QUEST® warrants your CRYSTAL QUEST® Bath Ball Filter for one year from the date of purchase against all defects in materials and workmanship when used in compliance with the manual. CRYSTAL QUEST® disclaims all implied warranties including, without limitation, warranties of merchantability and fitness for a particular purpose. If for any reason the product proves to be defective within one year from the date of purchase, please call for assistance. This warranty gives you specific legal rights and you may have other legal rights which vary from state to state. CRYSTAL QUEST® assumes no responsibility for incidental or consequential damages, for damages arising out of misuse of the product, or the use of any unauthorized attachment. Some states do not allow the exclusion or limitation of implied warranties or incidental or consequential damages; therefore, the above limitations or exclusions may not apply to you. Should service be required during or after the warranty period or should you have any questions regarding how to use your CRYSTAL QUEST® Bath Ball Filter, contact our Technical Support Department at service@crystalquest.com, Monday through Friday, 9 A.M. to 5 P.M. Eastern Time.

To register your warranty online visit:
<http://crystalquest.com/warranty.htm>



Bath Ball Filter User Guide



CQE-SP-00808



7 8 5 0 8 4 0 0 8 0 8 5



CQE-SP-00809



7 8 5 0 8 4 2 0 0 1 7 0

ISO 9001:2008
 Certified Manufacturer



Copyright© 2011 Crystal Quest®
 All rights reserved.

Hang the Bath Ball filter from its cord over the tub spigot, allowing the water to flow through it while the tub is filling.

BEFORE USING YOUR BATH BALL FILTER

1. Activate filter by running hot water through the Bath Ball disk for 2-3 minutes. This will flush loose media fines from the Bath Ball disk. Loose media fines are normal in a new disk and will be flushed out with use.
2. Adjust water to the desired temperature, then fill tub.

WHEN AND HOW TO CHANGE REPLACEMENT DISK

Replacement disk life (approximate) is 18-24 months. Filter life is directly related to your water conditions and volume of water filtered. Local water conditions may require more frequent replacement.

Review User Guide online at www.crystalquest.com for the most up-to-date version.



DISK REPLACEMENT


1. Unscrew the Bath Ball filter (Fig 1).
2. Replace the used disk with the new replacement disk (Fig 2).
3. Screw the housing back together (Fig 3).
4. Run hot water for 2-3 minutes to flush media fines from Bath Ball disk. Loose media fines in a replacement disk are normal and will be flushed out with use.



(Fig 1)

To order replacement disks, contact a Crystal Quest dealer or visit:

<http://crystalquest.com/showerfilters.htm>

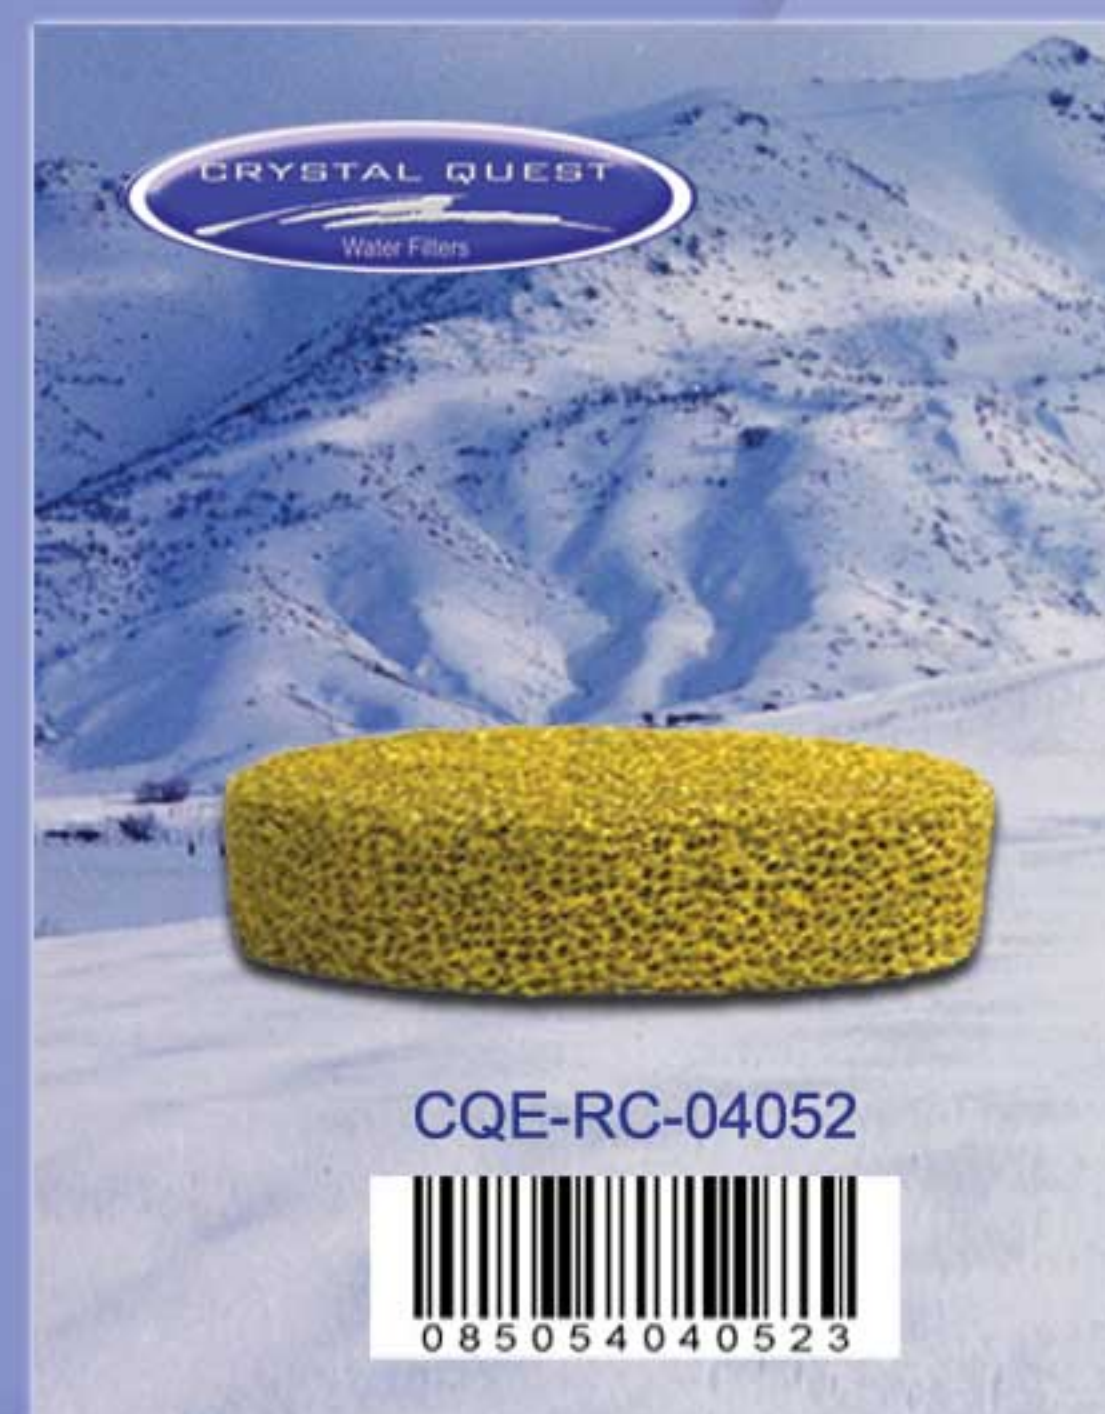

(Fig 2)

Replacement Disk



(Fig 3)