




Handheld and Shower Head Combo Luxury Shower Filtration System Installation and Operation Guide



INSTALLATION INSTRUCTIONS

1. Remove existing shower head from shower arm (pipe) by unscrewing it counterclockwise (do not unscrew shower arm).
2. Install Shower Filter by turning clockwise onto the shower arm.*
3. Attach Diverter Valve by turning clockwise onto the front of shower filter.*
4. Install Shower Head by turning clockwise onto other side of Diverter Valve.*
5. Attach Bracket by turning clockwise onto lower side of Diverter Valve.*
6. Attach one side of Hose by turning clockwise onto other side of Bracket.*
7. Attach the other side of Hose by turning clockwise onto the Handheld Shower Head.*
8. If leaks appear, tighten or reinstall.

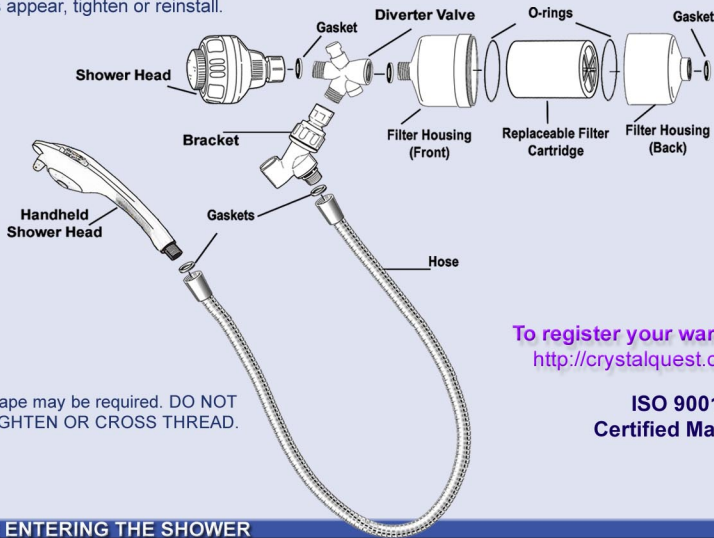

To register your warranty online, visit:
<http://crystalquest.com/warranty.htm>

**ISO 9001:2008
Certified Manufacturer**

* Teflon® tape may be required. DO NOT OVERTIGHTEN OR CROSS THREAD.

BEFORE ENTERING THE SHOWER

1. Activate filter by turning the shower water to "full-hot" for 2-3 minutes to flush media fines from shower filter. Loose media fines in a new cartridge are normal and will be flushed.
2. Cool to the desired temperature before entering shower.



7 85084 00806 7
CQE-SP-00806



7 85084 20016 3
CQE-SP-00807




WHEN AND HOW TO CHANGE YOUR CARTRIDGE

Cartridge life (approximate) is 6-12 months. Cartridge life is directly related to your water conditions and volume of water filtered. Local water conditions may require more frequent replacement.

CARTRIDGE REPLACEMENT


1. Unscrew the shower filter from the shower arm. It may not be necessary to unscrew the complete assembly from the shower arm (Fig 1).
2. Remove the old cartridge and replace with a new cartridge.
3. Make sure both O-rings are properly seated in the O-ring grooves. Apply a small amount of lubricant, such as petroleum jelly, to each O-ring (Fig 2).
4. Screw the housing back together (Fig 3).
5. Run hot water for 2-3 minutes to flush media fines from shower filter. Loose media fines in a new cartridge are normal and will be flushed out when in use.



(Fig 1)



(Fig 2)



(Fig 3)

MAINTENANCE / CAUTION

Caution: Protect disk from freezing temperatures. If freezing temperatures exist, drain unit and set wet replacement disk aside to dry. Protect disk from direct sunlight. Not intended for outdoor use.

Note: O-rings may need to be cleaned and lubricated periodically with non-petroleum based lubricants.

PROBLEMS / SOLUTIONS GUIDE

1. **Leaking around threaded connections:** Apply Teflon® tape to threads.
2. **Leaking between two housing halves:** Check that O-rings are properly seated in grooves and that housing halves are snugly threaded together. Clean any media fines.
3. **Poor water flow or chlorine odor returns:** Replace filter cartridge.

BACK FLUSHING

1. Unscrew the filter housing.
2. The cartridge can be used inversely. Simply remove the cartridge and reverse it by turning it around.
3. Reassemble the housing as per the instructions.
4. Use as normal.

"REMINDER" DECAL

The reminder decal is specially prepared as a reminder to change the cartridge routinely.

1. Use a pen to fill out the installation and replacement dates.
2. Peel off sticker and fix to the corner of a dry mirror or any glass surface.

One-Year Limited Warranty

CRYSTAL QUEST® warrants your CRYSTAL QUEST® Shower Filter System for one year from the date of purchase against all defects in materials and workmanship when used in compliance with the manual. CRYSTAL QUEST® disclaims all implied warranties including, without limitation, warranties of merchantability and fitness for a particular purpose. If for any reason the product proves to be defective within one year from the date of purchase, please call for assistance. This warranty gives you specific legal rights and you may have other legal rights which vary from state to state. CRYSTAL QUEST® assumes no responsibility for incidental or consequential damages, for damages arising out of misuse of the product, or the use of any unauthorized attachment. Some states do not allow the exclusion or limitation of implied warranties or incidental or consequential damages; therefore, the above limitations or exclusions may not apply to you. Should service be required during or after the warranty period or should you have any questions regarding how to use your CRYSTAL QUEST® Shower Filter System, contact our Technical Support department at service@crystalquest.com, Monday through Friday, 9 A.M. to 5 P.M. Eastern Time.

To order replacement cartridges,
contact a Crystal Quest dealer or visit:

<http://crystalquest.com/showerfilters.htm>

Model: CQE-RC-04045



7 8 5 0 8 4 0 4 0 4 5 5

